

# PARAFLU HT Cod. 1684

## ОПИСАНИЕ

Professional use, concentrated protective fluid for radiators. Monoethylene glycol base, formulated with organic inhibitors based on O.A.T. (Organic Acid Technology).


PARAFLU HT is a protective fluid for the cooling systems of industrial and commercial vehicles that contain innovative light alloy materials.

## ХАРАКТЕРИСТИКИ

Advanced stringent laboratory tests by FL Italy show that PARAFLU HT guarantees meet all requirement even in extreme running conditions.

PARAFLU HT mixed with 50% with water guarantees:

- | The maintenance of the protecting characteristics of the inhibitor agents.
- | Optimal heat removal from the engine combustion chamber.
- | The maximum protection against:
  - Cavitation and electrical discharge;
  - Freezing (down to external temperatures of  $-40^{\circ}\text{C}$ );
  - Limescale formation;
  - Boiling in the warm periods, traffic, city journeys (circuit temperature up to  $+110^{\circ}\text{C}$ );
  - Excessive swelling of rubbers and plastic in the circuit;
  - Formation of deposits in the circuit also in conditions of exasperated exercise.

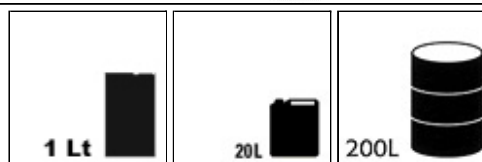

## РЕКОМЕНДАЦИИ ПО ИСПОЛЬЗОВАНИЮ

For proper use of the product, Manufacturers recommendations must be followed, however, replacement should be no more than every 2 years or kilometres as indicated by the Manufacturer.

- When refilling, in order to restore the level of the fluid, the product must be mixed with 50% water.
- Do not use the product concentrated.
- Do not mix products of different brand or origin.

## КЕМ РЕКОМЕНДОВАНО

Iveco e Iveco Bus

## ТЕХНИЧЕСКИЕ ДАННЫЕ

ASTM D 3306 Тип 1,

ТЕХНИЧЕСКАЯ ДОКУМЕНТАЦИЯ ПО КОНТРАКТУ, ДОКУМЕНТ № I103.N02